

Loading:



Monday – Friday 0800-1600hrs
Saturday/Sunday Check

PPE Requirements:



Additional Information:



Reporting/Arrival:



**No Pedestrian Access
Level Crossing
STOP when lights show**



On arrival STOP at barrier and book in at drivers window to obtain paperwork





When instructed by Load Checker reverse into allocated bay



Put on PPE. Prepare trailer for loading

Loading/Securing:

Stand in green area during loading

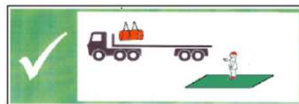

Trailers must be equipped with 11 pairs of lashing points minimum

LOADS MUST BE SECURED IN THE LOADING BAY – PLEASE HAVE STRAPS & RATCHETS READY



Minimum 12 Straps LC 2000 daN




NO WORKING ON OPEN EDGE ALLOWED!



No Climbing – Use trailer steps or mobile steps





1. Load Checker positions the anti-slip matting (6 pieces per coil) on the trailer bed

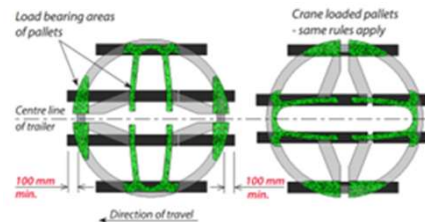

2. Alpha or base straps applied

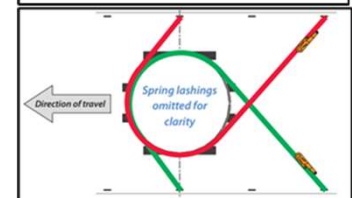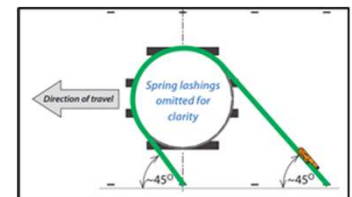

3. Spring lashing (Loops) straps applied

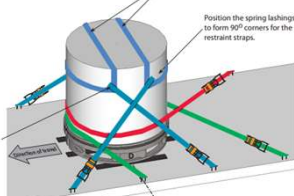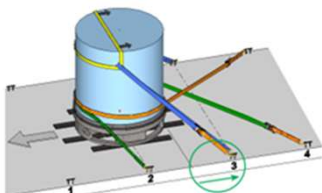

4. Load is checked & photographed by Load Checker



5. Collect CMR from Driver Window and leave site

